



Reichenbach Engineering

CM-13102

Line transformer - High impedance 10K : 10K + 10K (1:1+1)





- High impedance line splitter with 1:1+1 voltage step-up
- Also useful for line input for differential amplifiers
- Moderate line level capability
- Extended bandwidth
- Excellent CMRR: 110 dB at 60 Hz
- Threaded bushing mount or optional stud mount

The CM-13102 line splitter transformer was developed for both high impedance line splitting where significant voltage gain is required, and for feeding differential line amplifier input stages. Because the secondaries are isolated from each other, it is suitable for driving differential amplifier stages which cannot tolerate a center-tapped winding. It has extended bandwidth, excellent common mode rejection ratio (CMRR), and very good distortion characteristics. It is encased in a μ Metal can which provides 30 dB of magnetic shielding.

CM-13102

| Parameter | Conditions | Typ |
|---|--|-----------------------------------|
| Turns Ratio | | 1.00 : 1+1 |
| Voltage Gain | 1 kHz Rs=600 RI=600 Test Circuit 1 | -1.9 dBu |
| Distortion (THD+N%) | 1 kHz, +4 dBu Test Circuit 1, Rs=600 20 Hz, +4 dBu Test Circuit 1, Rs=600 | 0.0005% 0.03% |
| Max 20 Hz input level | 1.0% THD+N; Rs=600 Ω Test Circuit 1 | +22dBu |
| Response, ref 1 kHz | 20 Hz +4 dBu Test Circuit 1 20 kHz +4 dBu Test Circuit 1 -1.6 dBu | -0.08 dBu -0.01 dBu 200 kHz |
| Phase Shift at 20 Hz Phase Shift at 20 kHz | Referenced to source generator Test Circuit 1 | +3° -5° |
| Input CMRR | 60 Hz Test Circuit 2 per IEEE Std 389-1996 ¶19 3kHz Test Circuit 2 per IEE Std 389-1996 ¶19 | 109 dB 75 dB |
| Output CMRR | 60 Hz Test Circuit 3 Hz Test Circuit 3 | 72 dB 65 dB |
| Operating Temp Range | Operation and storage | 0° C Min 70° C Max |

4487 Ish Drive, Simi Valley, CA 93063 (818) 993-4644 cinemag@cinemag.biz <http://www.cinemag.biz>

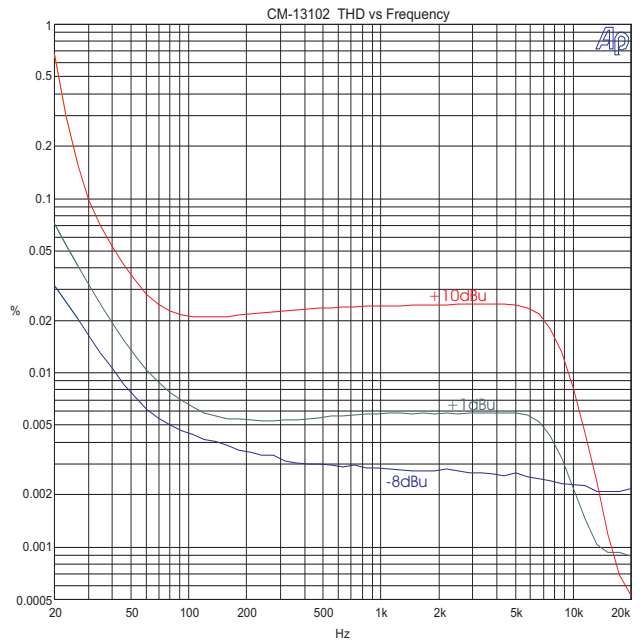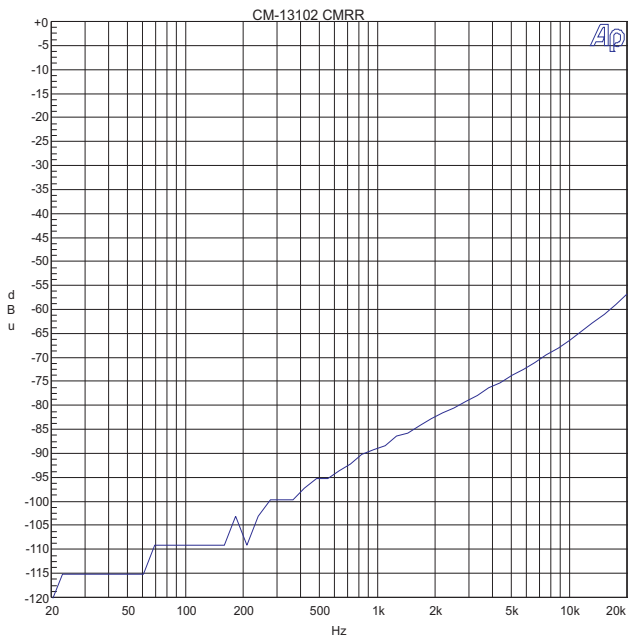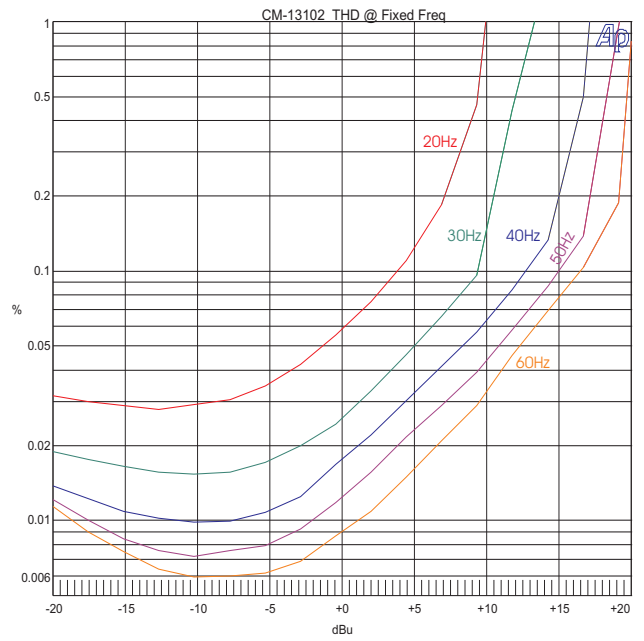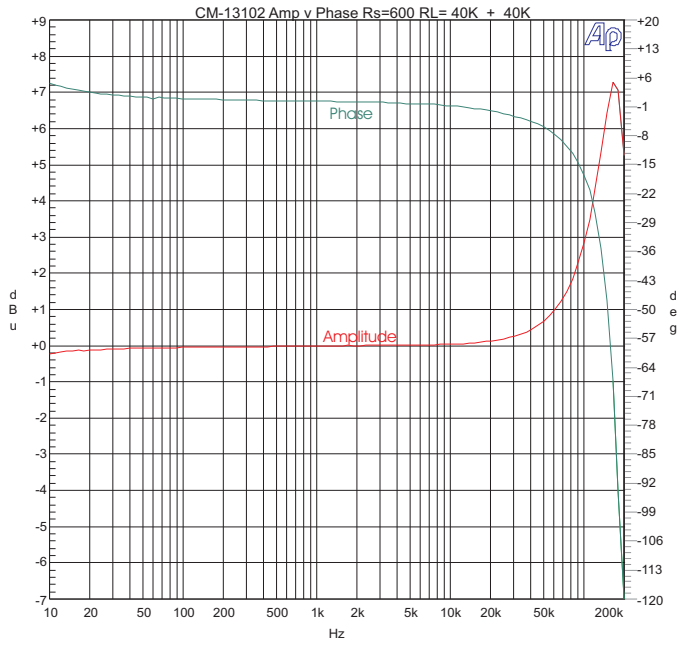

NOTE: All graphs generated from one randomly chosen device.
No statistical averaging or weighting. Data from one sweep.

